

107521404

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



Rec'd PCT/PTO 18 JAN 2005



(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/011220 A1

(51) International Patent Classification⁷: B28C 5/34, B01F 13/00, 15/02, 13/10, B28C 5/32, B28B 13/02, B01F 9/10

(74) Agent: CIRILLO, Gennaro; Via S. Lucia, N 15, I-80132 Napoli (IT).

(21) International Application Number:

PCT/IT2003/000434

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 10 July 2003 (10.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

NA2002A000045 30 July 2002 (30.07.2002) IT

(71) Applicant (*for all designated States except US*): SEIEFFE S.R.L. [IT/IT]; S.S. Appia Km 240,30, I-82013 Bonea (IT).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): IZZO, Antonio [IT/IT]; Via San Martino N.90, I-82016 Montesarchio (IT).

[Continued on next page]

(54) Title: A COMPOSITE MATERIAL SLAB PRODUCTION SYSTEM

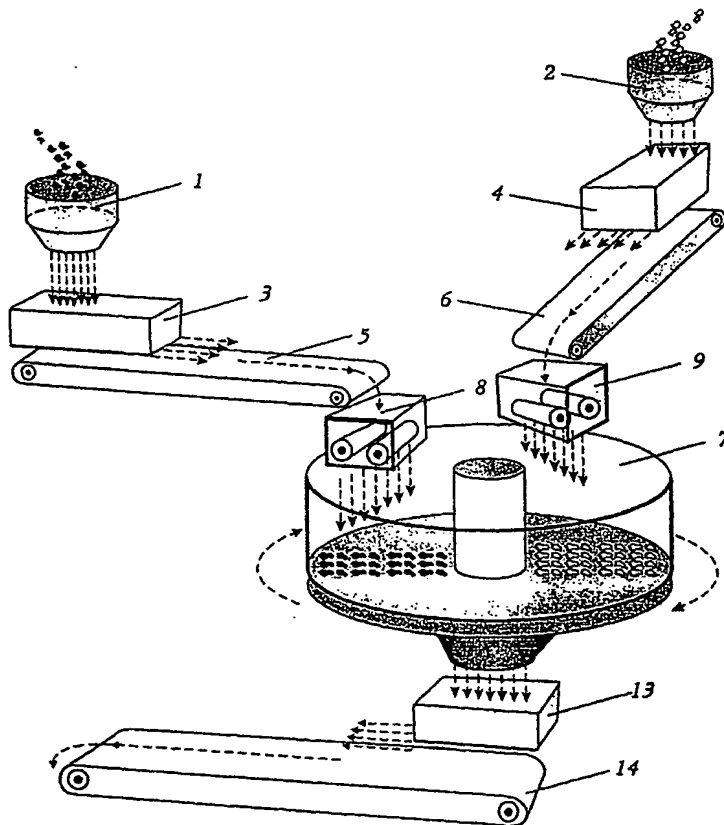

(57) Abstract: The invention relates to a system for the production of slabs of composite material characterized by a particular unloading system of the material from the mixers (1, 2) to a homogenizing disc (7) so as to provide a constant, homogeneous composition of the material in the different working cycles, and by a particular distribution system of the material into the rubber moulds (23) so that the material is not further moved once unloaded from the homogenizing disc. The latter condition allows, in addition to the aesthetic uniformity of the product, further colours and different mixtures to be added to the slab being formed.

WO 2004/011220 A1